

# LIFT/TILT TABLES

1,000/2,000/4,000 LBS

LIFT & TILTS

8" high front retaining lip c/w side gussets.

Lift and tilt, integrated as one unit (not two separate machines put together).

All Pivot and Wear Points Have Bronze Self Lubricating Bushings

Internally Mounted Power Pack (for A/C units only)



## CAPACITY

- 1,000/2,000/4,000 lbs.

## SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing due to hose failure

## TILT ANGLE

- 0-30/45 degrees

## LOWERED HEIGHT

- 12"

## TRAVEL

- 24", 36", 42"

## FRONT RETAINING LIP

- 8" high (standard)

## POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand or foot operated

A/C 460/575/3/60 volt (opt.)

Hand or foot operated

Air/Hydraulic

Foot operated (standard)


Hand operated (optional)

## OPTIONS

- Platforms: wider or deeper
- Bellow safety skirting
- Stainless steel, galvanized or 'steel-it' painted units
- Lift/tilt: reduced or increased



## OPTIONS

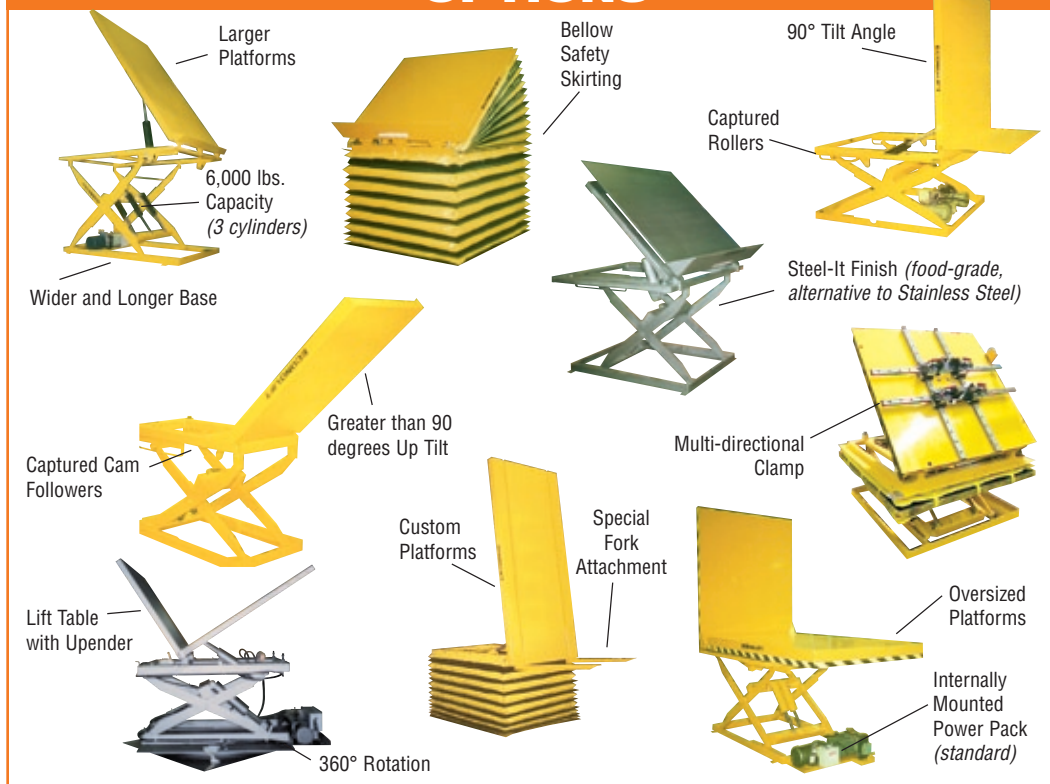

MODEL NO.	CAPACITY (lbs.)	LOW'D HEIGHT (IN.)	TRAVEL (IN.)	TOTAL HEIGHT (IN.)	STANDARD PLATFORM AND BASE (W x D) (IN.)	OVERSIZED PLATFORM UP TO (W x D) (IN.)	UP SPEED APPROX	MOTOR H.P.
<b>24" TRAVEL - 48" x 36" (W x D) PLATFORM - TILT ANGLE 0 - 30°</b>								
TR-SL 24-10	1,000	12	24	36	48 x 36	60 x 60	15	1
TR-SL 24-20	2,000	12	24	36	48 x 36	60 x 60	21	1
TR-SL 24-40	4,000	12	24	36	48 x 36	60 x 60	30	1 1/2
<b>36" TRAVEL - 48" x 48" (W x D) PLATFORM - TILT ANGLE 0 - 45°</b>								
TR-SL 36-10	1,000	12	36	48	48 x 48	72 x 72	20	1
TR-SL 36-20	2,000	12	36	48	48 x 48	72 x 72	30	1
TR-SL 36-40	4,000	12	36	48	48 x 48	72 x 72	35	1 1/2
<b>42" TRAVEL - 60" x 48" (W x D) PLATFORM - TILT ANGLE 0 - 45°</b>								
TR-SL 42-10	1,000	12	42	54	60 x 48	84 x 72	25	1
TR-SL 42-20	2,000	12	42	54	60 x 48	84 x 72	35	1
TR-SL 42-40	4,000	12	42	54	60 x 48	84 x 72	45	1 1/2